


Product datasheet

Specifications

Under-voltage release 220VAC for MA2, MA3

UVTU2MA3

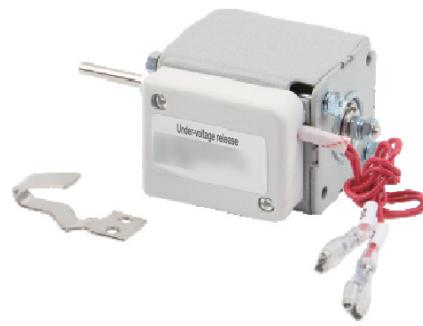

Standard	IEC 60947-2
Device application	Protection
Range of product	ACB code MA2, MA3
Product or component type	Undervoltage release
Rated operational voltage, Us	220V
Rated frequency	50/60Hz
Action voltage	0.35~0.7Us
Reliable making voltage	0.85~1.1Us
Reliable non-making voltage	≤0.35Us
Delay time	0s
Installation side	Right side of the MCCB
Auxiliary connection terminal	Lead wire

