


Product datasheet

Specifications

Undervoltage trip 400V - Right for Frame 125

UVTV7R125M

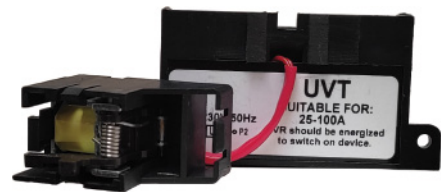

Standard	IEC 60947-2
Device application	Protection
Range of product	MCCB Frame 125
Product or component type	Undervoltage trip
Rated operational voltage, U_s	400V
Rated frequency	50/60Hz
Action voltage	0.35~0.7 U_s
Reliable making voltage	0.85~1.1 U_s
Response time	50ms
Range compatibility	MCCB - MF125 MCCB - MT125
Installation side	Right side of the MCCB
Connection - terminal	Screw clamp terminals

