# Product datasheet

Specifications

## MCCB Fixed type MF250E 4P 200A 36kA

MF250E4200A
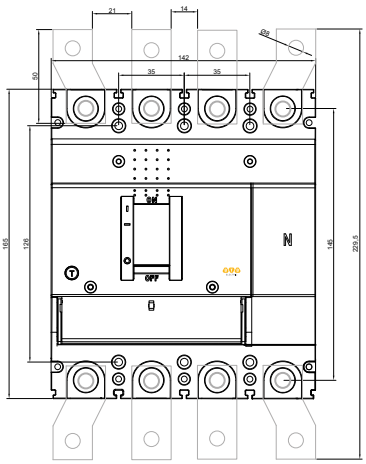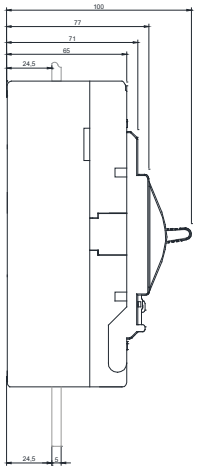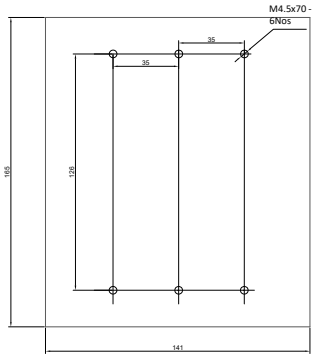
| | |
|---|---|
| Standard | IEC/EN 60947-2 |
| Model | MF250E |
| Rated current at 40°C, In | 200A |
| Number of poles | 4 |
| Rated frequency | 50/60Hz |
| Rated Operational Voltage, Ue | 690V |
| Rated Insulation Voltage, Ui | 1000V |
| Impulse Withstand Voltage, Uimp | 8kV |
| Utilization Category | Cat. A |
| Trip unit | Thermal Magnetic (T01) |
| Long time, Ir | 1.0xIn |
| Instantaneous, Ii | 10xIn |
| Breaking capacity level | E |
| Rated ultimate short-circuit breaking capacity, Icu (380/415V) | 36kA |
| Rated service short-circuit breaking capacity, Ics (380/415V) | 25kA |
| Mechanical Endurance | 25000 times |
| Electrical Endurance | 8000 times |
| Weight | 2.3kg |
| Dimension (W x L x H) | 142x165x100mm |