

Power Factor Regulator

PFR60/PFR120



Salient Features

- Microprocessor based intelligent auto switching control.
- Automatic / Manual control mode.
- Automatic C/K and rated step adjustment.
- Automatic CT polarity correction.
- Programmable sensitivity.
- Programmable alarm.
- Last step can be used as alarm/fan output.
- Alarm of Under/over voltage, under/over compensate, step fault and high harmonic distortion.
- Programmable L-L and L-N voltage sensing.
- Displays measured values of $\text{Cos}\phi$, I, V, W, VA, VAR and THD.
- Complies with IEC 61000-6-2 standard.

Application

The BTB Electric PFR60/PFR120 precisely regulate power factor in industrial and commercial networks. They dynamically control capacitor banks, switching steps ON or OFF to maintain the target $\text{cos}\phi$ and minimize reactive power. Real-time measurements of voltage, current, active, reactive, and apparent power enable accurate compensation and detailed system monitoring.



Designed by BTB Electric
E-mail: sales@btb-electric.com
Web: btb-electric.com




Technical specifications

Auxiliary Supply	
Supply voltage	380 ~ 415V for PFR60V7/ PFR120V7 200 ~ 240V for PFR60P7/ PFR120P7
Operating voltage Range	-15% ~ +10%
Frequency	50Hz or 60Hz
Power consumption	10VA max
Current Input	
Rated current (In)	5A
Operating current range	0.02 ~ 8A
Rated Frequency	50Hz or 60Hz
Power consumption	3VA max
Relay Output	
Numbers of outputs	6/12
Output contact	5A at 250V
Contact arrangement	NO contact type
Expected electrical life	≥ 100,000 operations at rated current
Expected mechanical life	≥ 5,000,000 operations
Max current for the common terminals	12A continuous
Control Range	
Cosφ setting	0.80 (ind.) ~ -0.80 (cap)
C/k setting	Automatic / 0.02-1.2
Switching Sensitivity	5 ~ 600 s/step
Reconnection Time for Same Step	5 ~ 240s
Switching Program	Off / Automatic / Rotational / Manual / Four-quadrant
Rated Step Coefficient	1 ~ 16 / Fix / Off
Display	
Display screen	LED
Measurement	Cosφ, I, V, W, VA, VAR and THD
Environmental Conditions	
Ambient temperature	-5°C ~ 55°C
Humidity	93% non-condensing
Enclosure protection	IP54 at the panel
Mechanical	
Mounting	Panel mounting
Connections	Socket terminals with screw
Dimension (WxHxD)	144x144x91mm
Switchboard cut-out	138x138mm
Weight	1.0kg

Typical wiring diagram

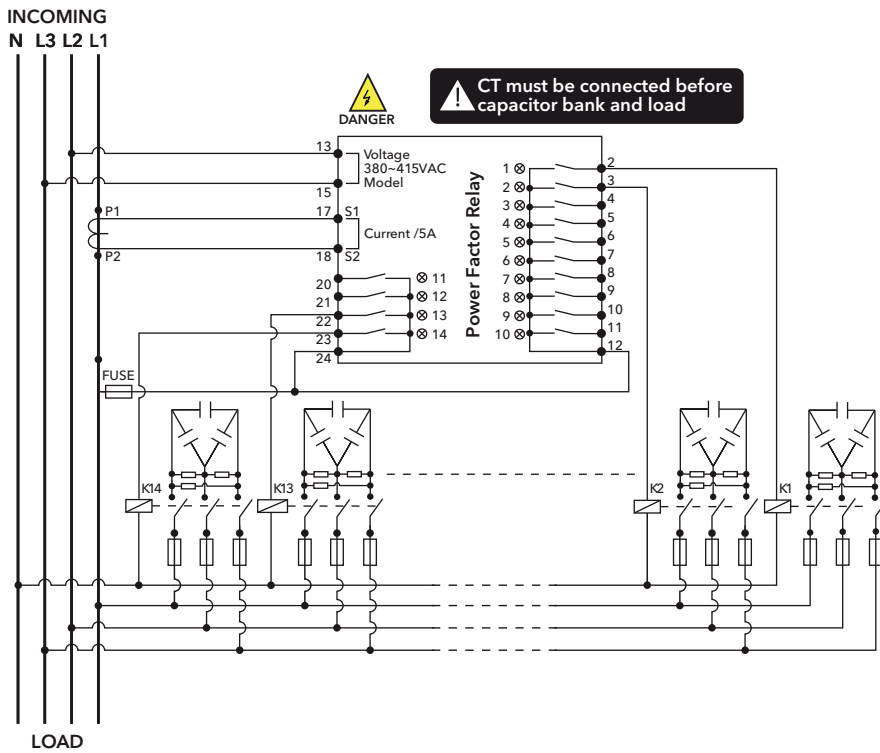


For 200~240 VAC model and L-L voltage system only



For 200~240 VAC model and L-N voltage system only

Dimension and structure

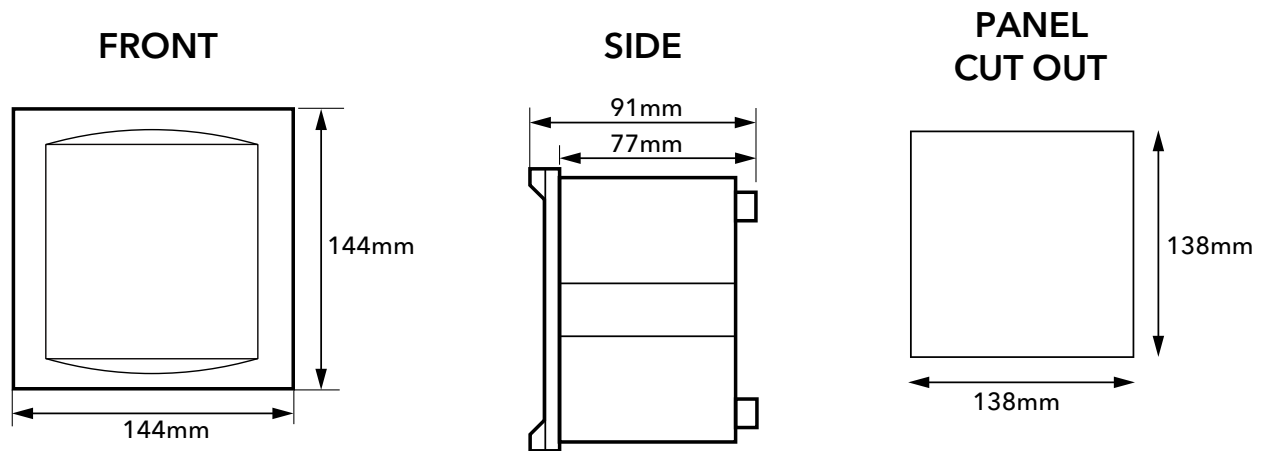

Ordering Information

Product code	Explain
PFR60V7	6 steps, 50 or 60Hz system, auxiliary voltage 380~415V
PFR120V7	12 steps, 50 or 60Hz system, auxiliary voltage 380~415V
PFR60P7	6 steps, 50 or 60Hz system, auxiliary voltage 200~240V
PFR120P7	12 steps, 50 or 60Hz system, auxiliary voltage 200~240V