


Technical Datasheet

6532 SURFACE MOUNT LED TUBE SERIES

The Surface-Mounted LED Tube is constructed from premium polycarbonate (PC), offering exceptional durability and reliable long-term performance. Its sleek surface-mounted design enables quick and easy installation while providing a clean, modern appearance. Available in multiple configurations with luminous outputs ranging from 650 lm to 2,600 lm, it integrates seamlessly into a wide range of modern interior and architectural lighting applications.

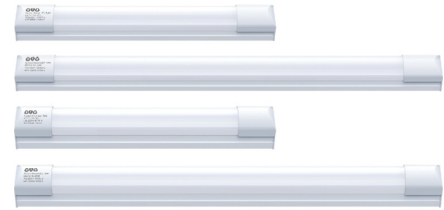

6532 xxxY Z002


xxx = Power

Y = CCT


Z = Size

Input Voltage	100-250V~
Frequency	50/60Hz
Power (xxx)	008W, 016W and 032W
Correlated Color Temperature (Y = 3 or 4 or 6)	3000K (3) or 4000K (4) or 6500K (6)
Luminous Efficacy (rated) (Nom)	81lm/W
Power Factor	>0.7
Color rendering index (CRI)	>80
Luminaire light beam spread	125 - 160°
Luminous flux tolerance	+/-6%
Median useful life L70B50	30000 hours
Ambient temperature range	-20 to +40°C
Protection rating	IP20
Protection class IEC	Safety class II
Dimensions	

Code	Power	Product Size (mm)	Packing (Qty/Ctn)
6532 008Y 1002	8W	588x26x30	30
6532 016Y 2002	16W	1198x26x30	30
6532 016Y 1002	16W	588x36x56	12
6532 032Y 2002	32W	1198x36x56	12

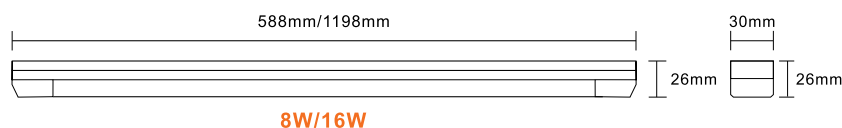

8W/16W



18W/36W