


Technical Datasheet

6601 SERIES ULTRA SLIM LED PANEL

The Ultra Slim LED Panel features a premium die-casting aluminum housing with an elegant 7mm ultra-slim profile, delivering exceptional durability, uniform illumination, and enhanced aesthetics for modern spaces.

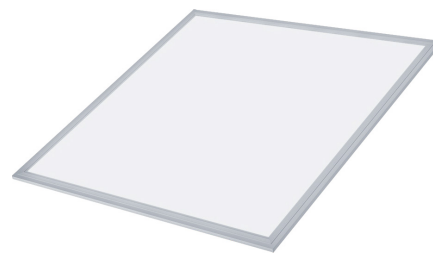


6601 xxxY 2002

xxx = Power

Y = CCT

Input Voltage	100-250V~
Frequency	50/60Hz
Power (xxx)	040W and 050W
Correlated Color Temperature (Y = 3 or 4 or 6)	3000K (3) or 4000K (4) or 6500K (6)
Luminous Efficacy (rated) (Nom)	95lm/W
Power Factor	>0.7
Color rendering index (CRI)	>80
Luminaire light beam spread	115°
Luminous flux tolerance	+/-6%
Median useful life L70B50	30000 hours
Ambient temperature range	-20 to +40°C
Protection rating	IP20
Protection class IEC	Safety class II
Dimensions	

Code	Power	Product Size W x L x H (mm)	Packing (Qty/Ctn)
6601 040Y 2002	40W	595x595x7	6
6601 050Y 2002	50W	595x595x7	6



40W/50W