


Technical Datasheet


6602 RECESSED LED PANEL SERIES

The Recessed LED Panel features a durable high-strength iron housing with a standard 600×600mm recessed design, providing reliable performance, uniform illumination, and seamless integration into modern ceiling systems. Equipped with 3CCT adjustable technology, it allows easy switching between three color temperature options to suit different lighting environments.

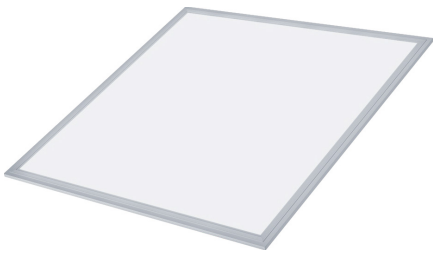

6602 xxxY 2002
xxx = Power
Y = CCT

Input Voltage	100-250V~		
Frequency	50/60Hz		
Power (xxx)	040W and 050W		
Correlated Color Temperature (Y = 3 or 4 or 6 or 9)	3000K (3) or 4000K (4) or 6500K (6) 3000/4000/6500K (9)		
Luminous Efficacy (rated) (Nom)	108lm/W		
Power Factor	>0.7		
Color rendering index (CRI)	>80		
Luminaire light beam spread	115°		
Luminous flux tolerance	+/-6%		
Median useful life L70B50	30000 hours		
Ambient temperature range	-20 to +40°C		
Protection rating	IP20		
Protection class IEC	Safety class II		
Dimensions			
Code	Power	Product Size W x L x H (mm)	Packing (Qty/Ctn)
6602 040Y 2002	40W	600x600x30	2
6602 050Y 2002	50W	600x600x30	2



40W/50W